


D

### SPECIFICATION:

1. CURRENT RATING:DC 12V 50mA.
2. DIELECTRIC WITHSTANDING VOLOTAGE:  
250VAC R. M. S. FOR ONT MINUTE.
3. INSULATION RESISTANCE:100M OHMS MIN. AT100V DC
4. CONTACT RESISTANCE:100m OHMS MAX.
5. SMD SOLDERING CONDITION:260°C MAX. 3SEC
6. OPERATING LIFE:100,000 CYCLES.
7. OPERATING FORCE:260±80gf

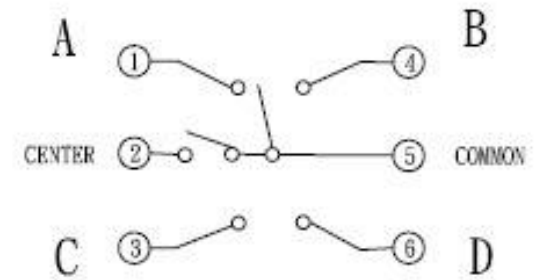

CIRCUIT DIAGRAM