
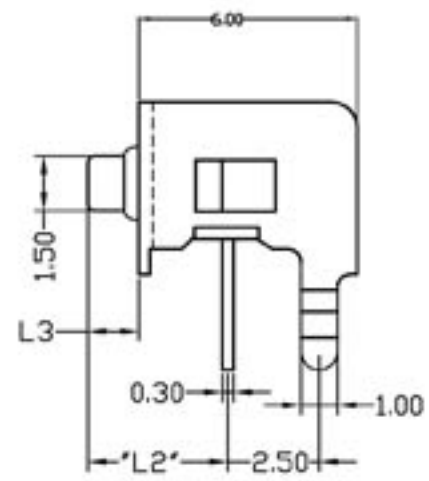




CODE: A	Operation strength	CODE. (B)	43	50
G	160g	STANDARD(L1)	4.3	5.0
H	260g	STANDARD(L2)	3.15	3.85
		STANDARD(L3)	0.6	1.3

REV. 版本	MODIFICATION 修改	DATE 日期	DRAWING 制圖	CHECKED 審核	APPROVED 核准
1					
2					

ROHS

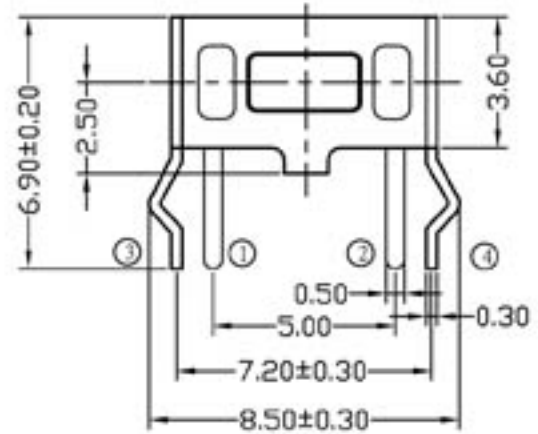


P.C.B LAND PATTERN

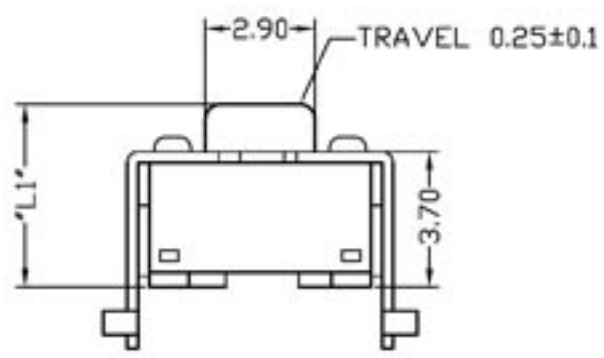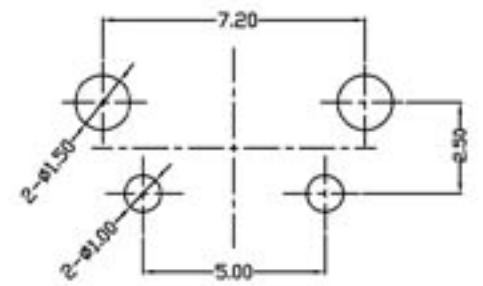

**SPECIFICATION:**

1. CURRENT RATING: 12V 50mA
2. DIELECTRIC WITHSTANDING VOLTAGE: 250vAC R. M. S. FOR ONT MINUTE.
3. INSULATION RESISTANCE: 100M OHMS MIN. AT 100V DC
4. CONTACT RESISTANCE: 100m OHMS MAX.
5. OPERATING TEMPERATURE: -20°C TO +70°C
6. OPERATING LIFE: 50,000 CYCLES.

CIRCUIT DIAGRAM



CODE:A CODE:B

KSM-1F □4□□0

<h1 style="margin: 0;">NTE</h1> <p style="margin: 0;">NTE INTERNATIONAL CO., LTD</p>	NAME 名稱	輕觸開關	Quantity 數量		SIZE 紙張	A4	DWG 繪圖		DIM TOL	Ang Tol
	DWG NO. 料號	KSM-1F □4□□0	H R C 硬度		SHEET 頁數	1/1	PROJ 設計		X ±0.30	X.XX ±0.10
	MATERIAL 材質		SCALE 比例	SCALE	REV 版本	B/1	CHKD 審核		X.X ±0.20	X.XXX ±0.05
			UNIT 單位	MM	DATE 日期	2009/12/29	APPD 核准		成品圖	